



Feed slide

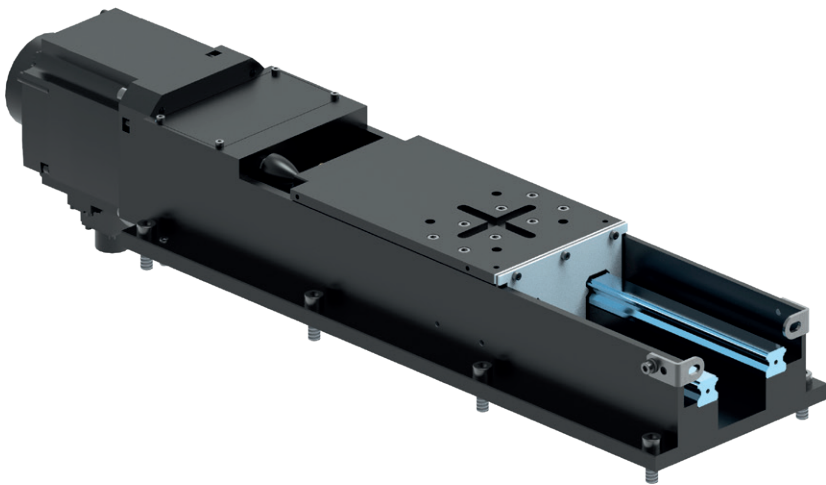


TECHNICAL SPECIFICATIONS

MAIN CONE	200 mm
MAXIMUM THRUST FORCE	5400 N
MAXIMUM FEED SPEED	20 m/min
MAXIMUM MOMENT (Mx)	840 Nm
MAXIMUM MOMENT (My)	660 Nm
SPINDLE	Ø25x5
WEIGHT	50 kg

ACCESSORIES

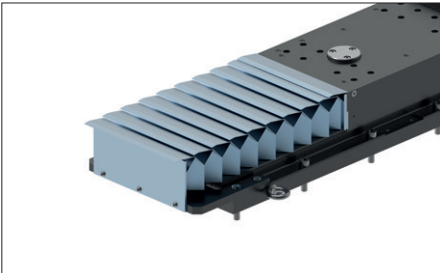

Bellows protection

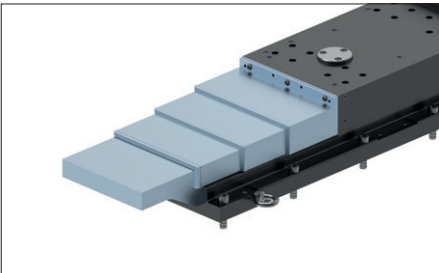


Telescopic protection



Micro rule

DIMENSIONS

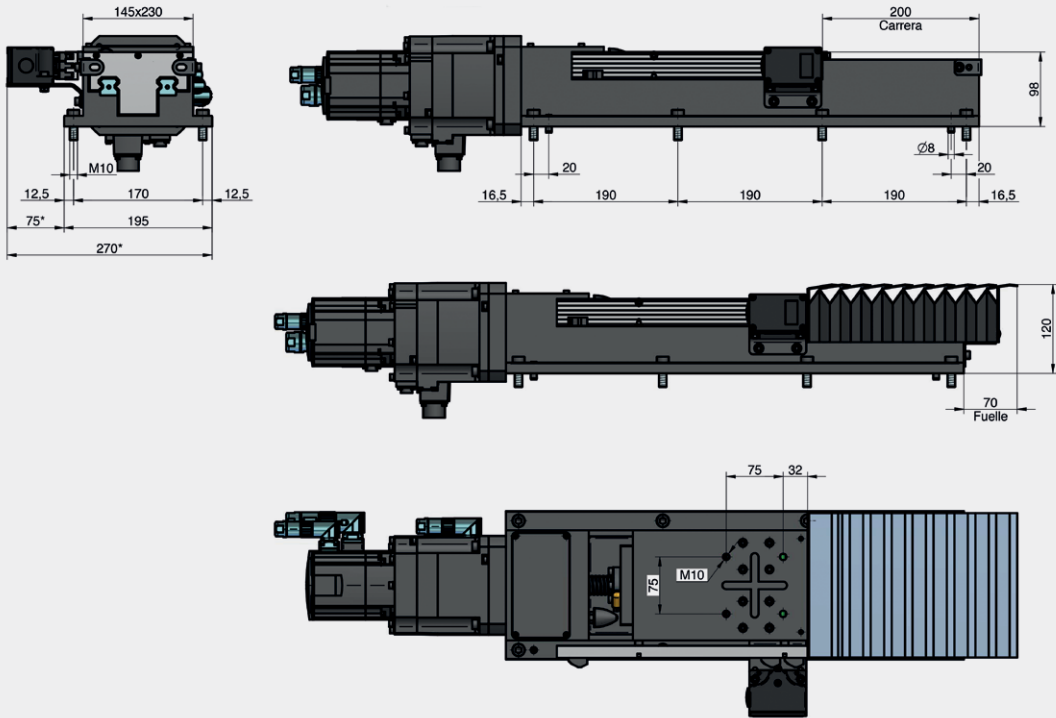

CONFIGURATION SYSTEM

CA.16 PR 801 0

1 - Protection

PR: Guide protection with scraper (standard)	(SC-CA16-007)
PF: Guide protection with bellows	(SC-CA16-005)
PT: Guide protection with telescopic guard	(SC-CA16-004)

3 - Micro rule

0: Slide without micro rule	
R: Slide with micro rule on the right	(SC-CA30-006)
L: Slide with micro rule on the left	(SC-CA30-006)

2 - Motor support

	Ø Flange	Ø Shaft	Subassembly
801	Ø80	Ø14	SC-CA30-801
802	Ø80	Ø16	SC-CA30-802
803	Ø80	Ø19	SC-CA30-803
811	Ø90	Ø19	SC-CA30-811