



Feed slide

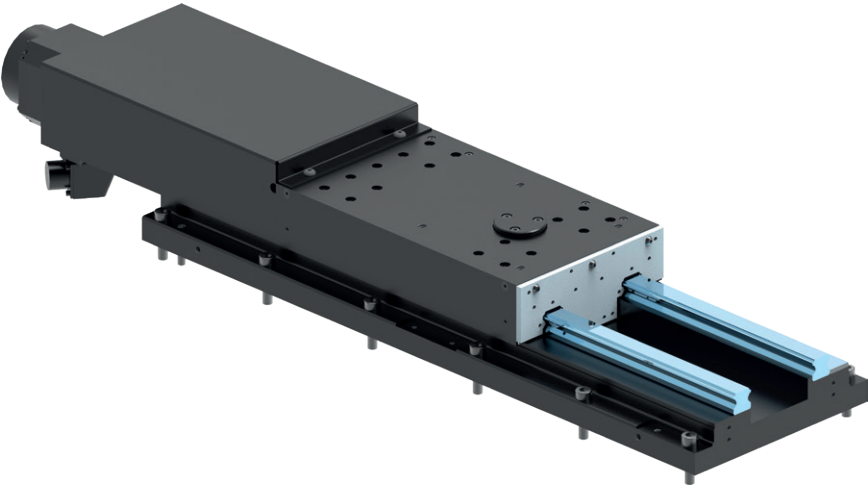


TECHNICAL SPECIFICATIONS

MAIN CONE	250 mm
MAXIMUM THRUST FORCE	8000 N
MAXIMUM FEED SPEED	30 m/min
MAXIMUM MOMENT (M _x)	840 Nm
MAXIMUM MOMENT (M _y)	660 Nm
SPINDLE	Ø25x5
WEIGHT	75 kg

ACCESSORIES

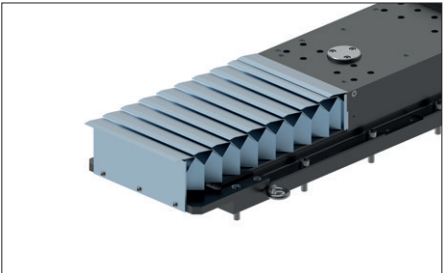

Bellows protection

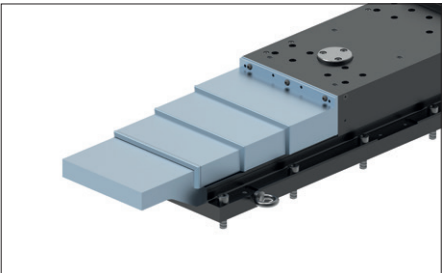


Telescopic protection



Micro rule

DIMENSIONS

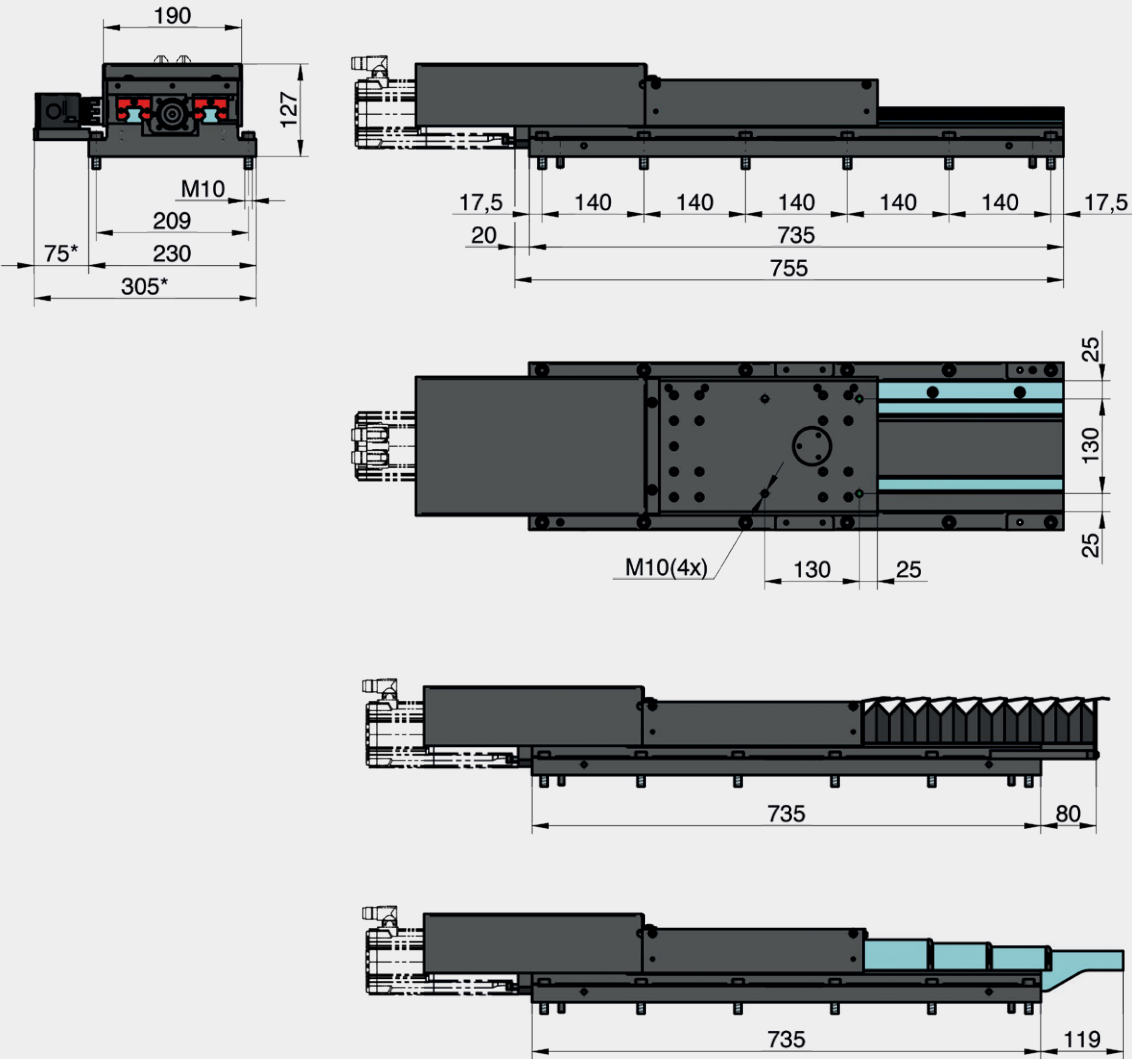

CONFIGURATION SYSTEM

CA.30 PR 801 0

1 2 3

1 - Guide protection

PR: Guide protection with scraper (standard)
PF: Guide protection with bellows
PT: Guide protection with telescopic guard

3 - Micro rule

Ø: Slide without micro rule
R: Slide with micro rule on the right
L: Slide with micro rule on the left

2 - Motor support

	Ø Flange	Ø Shaft
801	Ø80	Ø14
802	Ø80	Ø16
803	Ø80	Ø19
811	Ø90	Ø19