



Feed slide

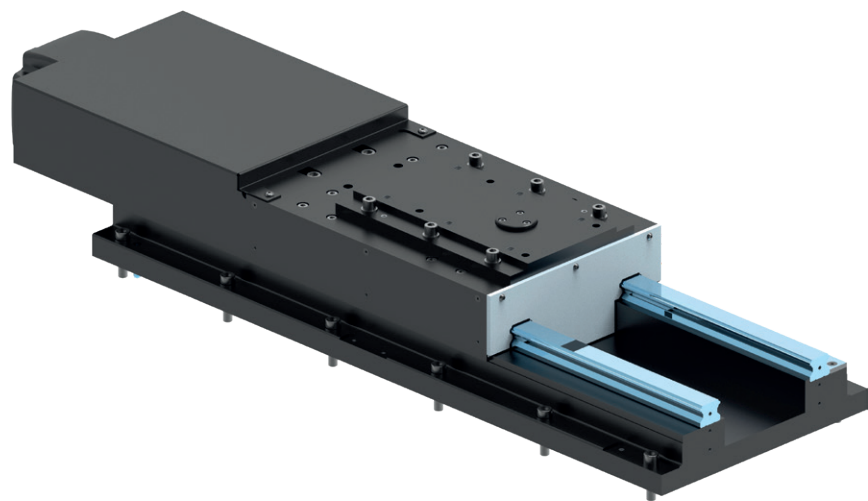


TECHNICAL SPECIFICATIONS

MAIN CONE	320/400 mm
MAXIMUM THRUST FORCE	24000 N
MAXIMUM FEED SPEED	40 m/min
MAXIMUM MOMENT (Mx)	2320 Nm
MAXIMUM MOMENT (My)	1620 Nm
SPINDLE	Ø32x10
WEIGHT	250 kg

ACCESSORIES

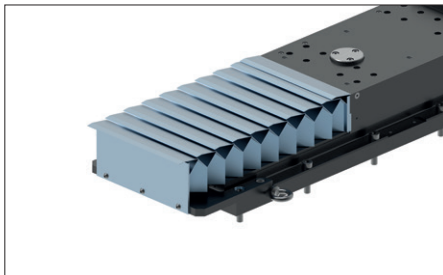

Bellows protection

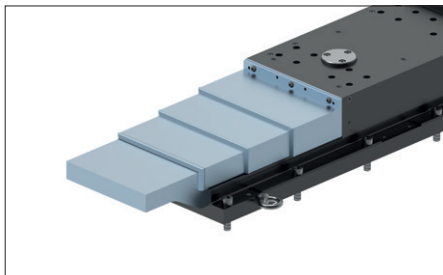


Telescopic protection



Micro rule

DIMENSIONS

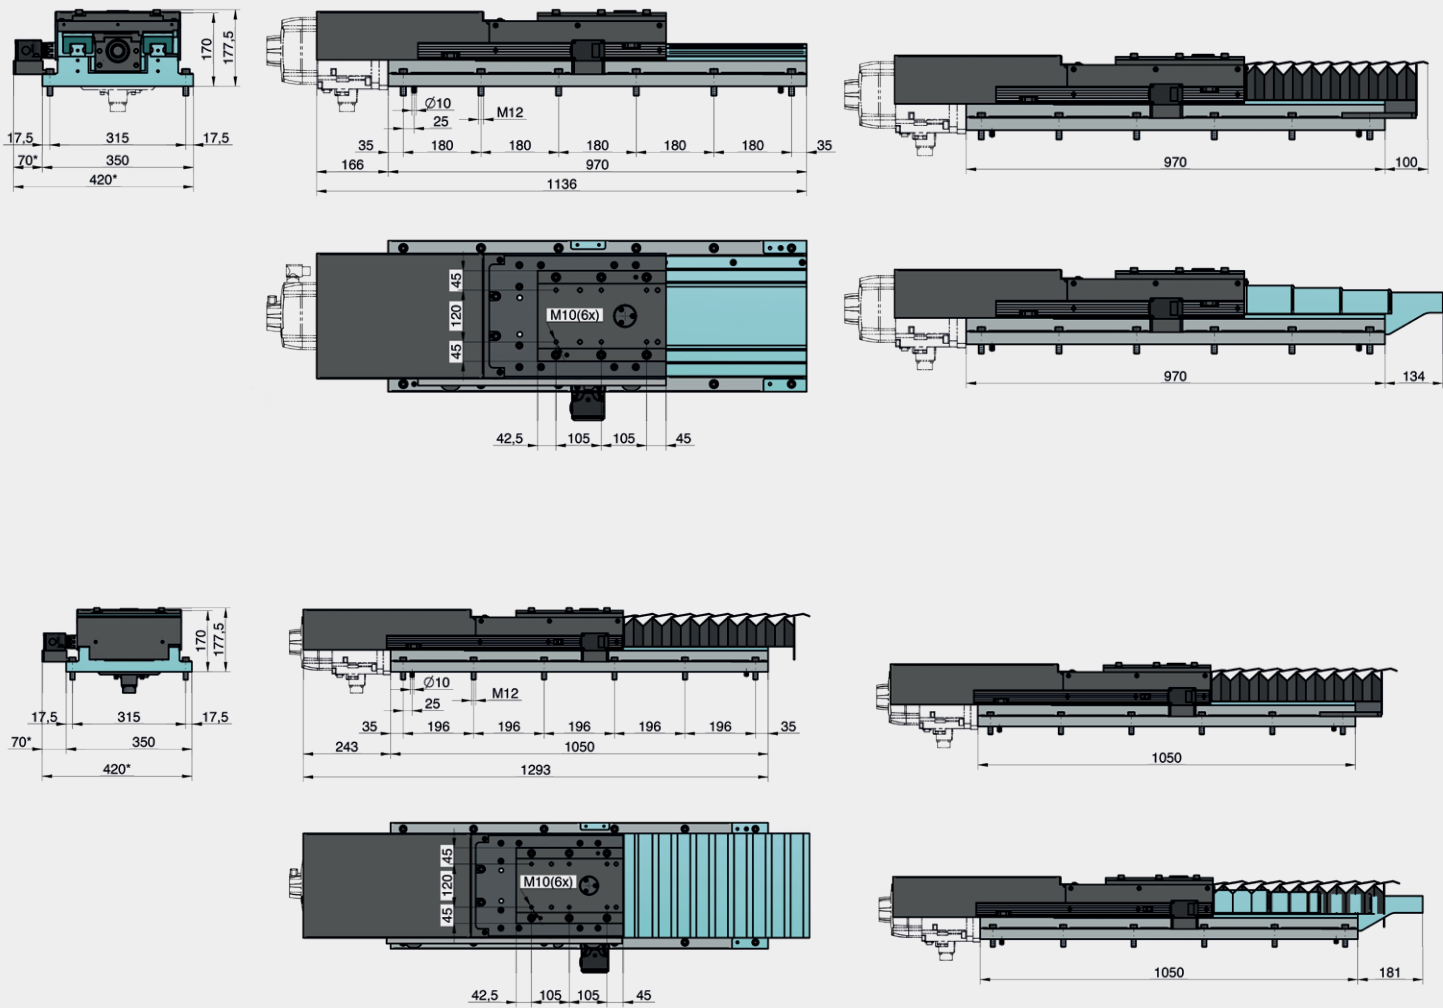

CONFIGURATION SYSTEM

CA.40 S PR 700 0

1 2 3 4

1 - Range

S: Range 320 mm
L: Range 400 mm

2 - Protection

PR: Protection with scraper
PF: Protection with bellows
PT: Protection with telescopic guard
NOTE: Protection with scraper not available
for slide with range 400 mm.

3 - Motor support

	Ø Flange	Ø Shaft
700	Ø95	Ø24-Ø19
800	Ø114.3	Ø35-Ø24
900	Ø130	Ø32-Ø24

4 - Micro rule

O: Slide without micro rule
R: Slide with micro rule on the right
L: Slide with micro rule on the left